

[Home \(https://www.liugong.com/en\)](https://www.liugong.com/en) | [Product](#) | [Scissor Lifts \(https://www.liugong.com/en/aerial_work_platforms\)](https://www.liugong.com/en/aerial_work_platforms) | LS0507EM

[Product Features](#)

[Applicable-Industry](#)

LS0507EM

- **Security And Intelligence:**Intelligent cc personnel safety;Intelligent charging sys
- **Easy To Control:**Drivable at full height t pocket, easy to load, unload and transp
- **Maintenance Friendly:**Self-lubricating : troubleshooting.



Max.Working Height: 6.5 m

Rated Load on Working Platform: 240kg

Overall Length/Width: 1.49*0.76 m

(<http://service.weibo.com/share/share.php?url=https://www.liugong.com:443/en/product/ls0507em/&title=Security And Intelligence:Intelligent control system, real-time monitoring of equipment status;Multi...>)

LS0507EM


Metric U.S

[Product Features](#)

[Specifications](#)

Product Features

[Compare product](#)

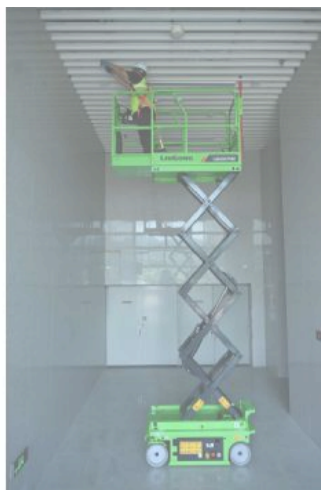

Specifications

LS0507EM-Mobile Elevating Working Platform (Electric Drive)

Max.Work Height	6.5 m
Max.Platform Height	4.5 m
Min.Platform Height	0.95 m
Platform Size (L×W)	1.3×0.72 m
Overall Length	1.49 m
Overall Width	0.76 m
Overall Height (Rails Down)	1.67 m
Max.Gradeability	25%
Lift Motor	24V/1.3kW
Rated Load on Working Platform	240 kg
Battery	24V/100Ah
Charger	24V/15A
Total Weight	970 kg

[Download Brochure \(https://www.liugong.com/wp-content/uploads/2024/05/AWP-LS0507EM-spec-A4-202501-EN-CE.pdf\)](https://www.liugong.com/wp-content/uploads/2024/05/AWP-LS0507EM-spec-A4-202501-EN-CE.pdf)

※For reference only.