

[Home \(https://www.liugong.com/en\)](https://www.liugong.com/en) | [Product](#) | [Scissor Lifts \(https://www.liugong.com/en/aerial\\_work\\_platforms\)](https://www.liugong.com/en/aerial_work_platforms) | LS0607E

[Product Features](#)

[Applicable-Industry](#)

# LS0607E

- **Security And Intelligence:**Intelligent cc personnel safety;Intelligent charging sys
- **Easy To Control:**Drivable at full height t pocket, easy to load, unload and transp
- **Maintenance Friendly:**Self-lubricating : troubleshooting.



**Max.Working Height:** 7.8 m

**Rated Load on Working Platform:** 230 kg

**Overall Length/Width:** 1.86\*0.785 m

(<http://service.weibo.com/share/share.php?url=https://www.liugong.com:443/en/product/ls0607e-2/&title=Security And Intelligence:Intelligent control system, real-time monitoring of equipment status;Multi...>)

## LS0607E


Metric U.S

[Product Features](#)

[Specifications](#)

### Product Features

[Compare product](#)

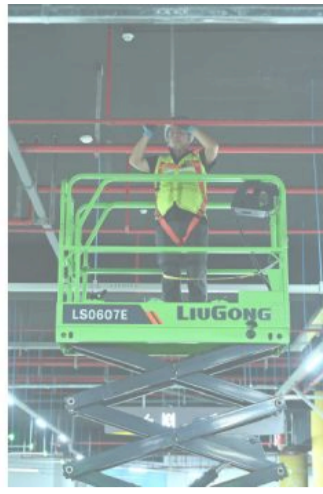

## Specifications

### LS0607E-Mobile Elevating Working Platform (Electric Drive)

Max.Work Height	7.8 m
Max.Platform Height	5.8 m
Min.Platform Height	0.95 m
Platform Size (L×W)	1.64*0.75 m
Overall Length	1.86 m
Overall Width	0.785 m
Overall Height (Rails Down)	1.72 m
Max.Gradeability	25%
Lift Motor	24V/3.3KW
Rated Load on Working Platform	230 kg
Battery	24V/225Ah
Charger	24V/30A
Total Weight	1540 kg

[Download Brochure \(https://www.liugong.com/wp-content/uploads/2024/05/AWP-LS0607E-spec-A4-202410-EN-GB-1.pdf\)](https://www.liugong.com/wp-content/uploads/2024/05/AWP-LS0607E-spec-A4-202410-EN-GB-1.pdf)

※For reference only.